

APPLICATION DATA SHEET



ENVIROGRAF®

AP068-10-2018

Product Number: 68

Rebated Intumescent Fire Seals

Description:

Rebated intumescent seals with self-adhesive backing supplied in 1050mm lengths and 2020mm lengths. Available in a range of colours and wood veneer facings. These seals offer up to one hour of fire protection.

Use:

For use in frames, edges of fire doors and behind door frames. Once fitted the facing of the seal can be painted. **Note: all fire doors must now be fitted with intumescent seals**

Application:



Seals can be easily cut to size to fit length of door edge or door frame.

Rout a suitable channel in door edge or frame surround so seal fits flush with edge. Seal should be fitted down centre of door edges or to meet centre of door edge if fitted in frame.


Once happy that routed channel is deep enough peel off backing strip to expose self-adhesive backing and fix seal in place.

Once fitted the face of the seal can be painted to match surround if required.

Also used for sliding doors and windows

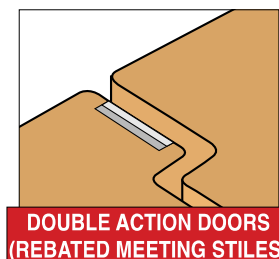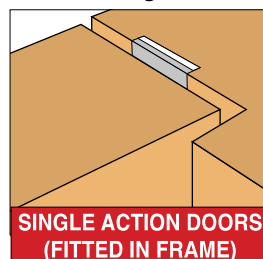

FITTING REQUIREMENTS FOR PRODUCT 68

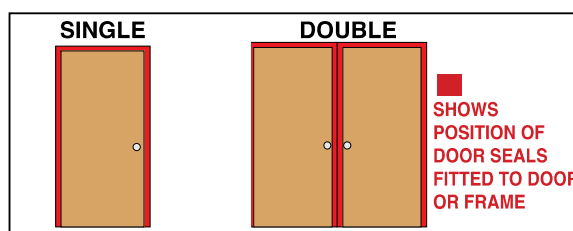

SEE ALSO ENVIROGRAF® PRODUCTS 69, 76, AND 100