



### Product Number: 55 (WBS) Cavity Barrier

#### Description:

The WBS Cavity Barrier is a flexible fire proof sponge which is fixed in a horizontal position in a brick/block cavity. The WBS has unique self spring properties and is fixed into the cavity by simply pressing the seal into place

#### Benefits:

##### **Fire proof sponge**


Ensures optimum durability and moisture protection as well as offering continued thermal insulation within the cavity section.

##### **Powerful intumescent seal**

In the event of a fire the intumescent seal will expand filling the cavity stopping the spread of fire and smoke

#### Advantages:

- Fully flexible
- Easy to install
- Allows free air movement
- Maintenance free
- Moisture resistant
- Thermal barrier protection

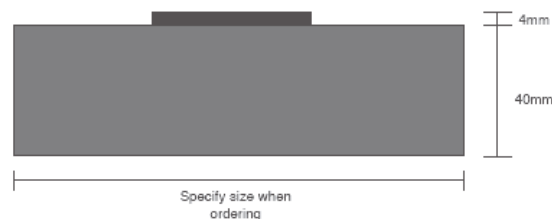

#### **FIRE TEST PERFORMANCE**

BS EN 1363-1 1999

132 min

## WBS Cavity Barrier



WBS - non-ventilated



A (WBS)- ventilated



B (WBS)- ventilated


## WB Foiled Cavity Barrier



WB - non-ventilated



A (WB) - ventilated

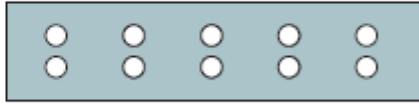

B (WB) - ventilated